

FIG. 1

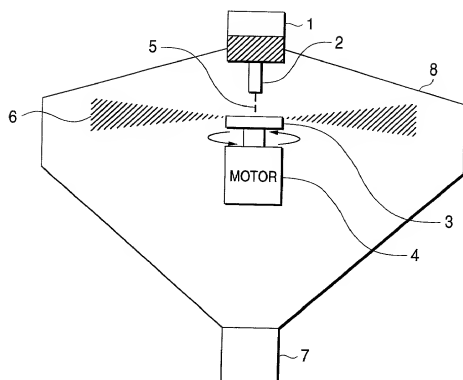


FIG. 2

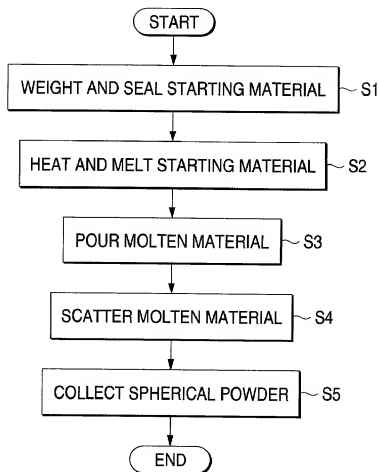


FIG. 3

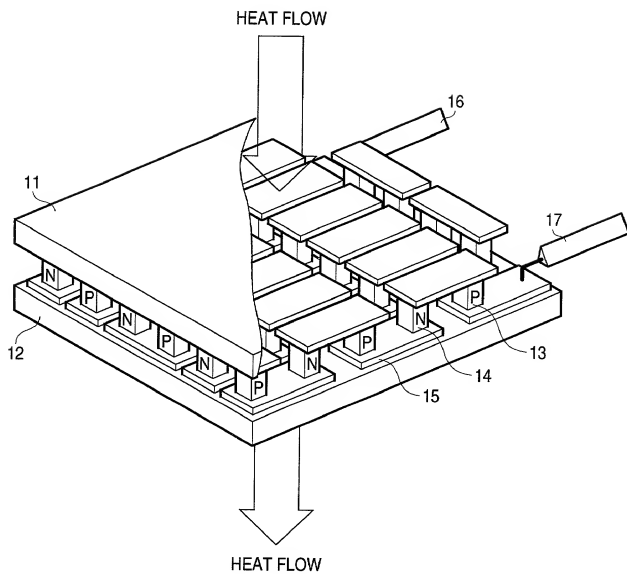




FIG. 4A*FIG. 4B*

FIG. 5

	MOLTEN MATERIAL COMPOSITION	DISK MATERIAL	SPECIFIC GRAVITY (g/cm ³)	THERMAL EXPANSION COEFFICIENT (x 10 ⁻⁶ /°C)	BENDING STRENGTH (MPa)	OPERATION STABILITY	REACTIVITY	POWDER YIELD	MEAN GRAIN SIZE
EXAMPLE 1	Bi ₂ (Te _{0.9} Se _{0.1}) ₃	Si ₃ N ₄	3.2	2.2	820	○	○	95%	25μm
EXAMPLE 2		SiAlON	3.2	2.2	820	○	○	93%	27μm
EXAMPLE 3	(Bi _{0.25} Sb _{0.75}) ₂ Te ₃	Si ₃ N ₄	3.2	2.2	820	○	○	96%	21μm
EXAMPLE 4		SiAlON	3.2	2.2	820	○	○	95%	22μm
COMPARATIVE EXAMPLE 1	Bi ₂ (Te _{0.9} Se _{0.1}) ₃	Ti-6Al-4V	4.4	8.4	700	○	×	85%	30μm
COMPARATIVE EXAMPLE 2	(Bi _{0.25} Sb _{0.75}) ₂ Te ₃	Ti-6Al-4V	4.4	8.4	700	×	×	57%	84μm
COMPARATIVE EXAMPLE 3	Bi ₂ (Te _{0.9} Se _{0.1}) ₃	BN	1.8	0.3	70	×	○	2%	-
COMPARATIVE EXAMPLE 4	(Bi _{0.25} Sb _{0.75}) ₂ Te ₃	BN	1.8	0.3	70	×	○	3%	-
COMPARATIVE EXAMPLE 5	Bi ₂ (Te _{0.9} Se _{0.1}) ₃	GRAPHITE	1.8	4	60	×	○	3%	-
COMPARATIVE EXAMPLE 6	(Bi _{0.25} Sb _{0.75}) ₂ Te ₃	GRAPHITE	1.8	4	60	×	○	3%	-
COMPARATIVE EXAMPLE 7	Bi ₂ (Te _{0.9} Se _{0.1}) ₃	BN + Ti HOLDER	4.4	8.4	700	×	○	65%	70μm
COMPARATIVE EXAMPLE 8	(Bi _{0.25} Sb _{0.75}) ₂ Te ₃	BN + Ti HOLDER	4.4	8.4	700	×	○	58%	73μm
COMPARATIVE EXAMPLE 9	Bi ₂ (Te _{0.9} Se _{0.1}) ₃	GRAPHITE + Ti HOLDER	4.4	8.4	700	×	○	67%	62μm
COMPARATIVE EXAMPLE 10	(Bi _{0.25} Sb _{0.75}) ₂ Te ₃	GRAPHITE + Ti HOLDER	4.4	8.4	700	×	○	62%	65μm

OPERATION STABILITY

○ : GOOD (VIBRATION NOT GENERATED)

X : VIBRATION GENERATED (MOTOR OVERLOADED, OR DISK RUPTURED)

REACTIVITY

○ : NO REACTION WITH MOLTEN MATERIAL

X : REACTION CORROSION WITH MOLTEN MATERIAL OBSERVED